

SPINAL EXCELLENCE

SPINAL ENDOSCOPES “MADE IN GERMANY” —
PRECISION & QUALITY THAT MAKE THE DIFFERENCE.

Experience the highest quality down to the last detail: our spinal endoscopes combine excellent imaging, durability and perfect illumination to enable precise work at the highest level. Each instrument is a masterpiece of German craftsmanship with uncompromising processing quality for maximum reliability in the operating theater. EndoLook endoscopes — for perfect vision, maximum safety and the good feeling of only working with the best.

YOUR BENEFITS




- 01 High-Precision Laser Welding**
For optimum tightness and durability



- 03 Wide Model Selection**
A variety of different working lengths, diameters or working channels for maximum flexibility

- 02 Milled Distal Stabilization Disc**
For extra stability during surgery & increased lifespan

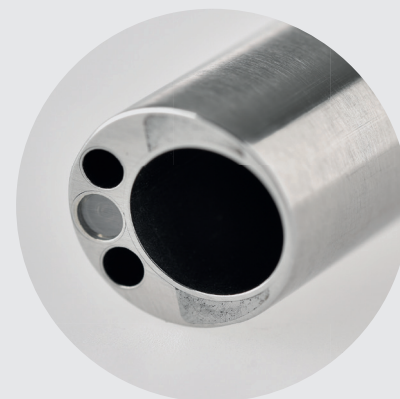


VERTEBROSCOPE



- 01 | ARTHROSCOPY
- 02 | GYNECOLOGY
- 03 | LAPAROSCOPY
- 04 | ENT
- 05 | THORACOSCOPY
- 06 | UROLOGY
- 07 | BRONCHOSCOPY
- 08 | PAEDIATRY
- 09 | VERTEBROSCOPE**
- 10 | ACCESSORIES

These special endoscopes with an angled eyepiece are used in several medical disciplines.

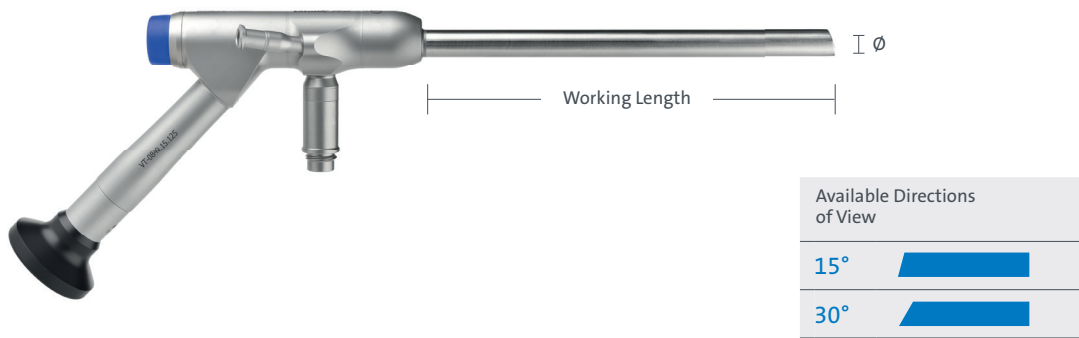

Article number	Ø Diameter	Working Length	Direction of View	Ø Working Channel	Ø Suctional & Irrigation Channel
VT-0630.15.171	6,3 mm	171 mm	15°	3,7 mm	1,4 mm
VT-0630.30.125	6,3 mm	125 mm	30°	3,7 mm	1,4 mm
VT-0630.30.171	6,3 mm	171 mm	30°	3,7 mm	1,4 mm
VT-0630.30.176	6,3 mm	176 mm	30°	3,7 mm	1,4 mm
VT-0630.30.181	6,3 mm	181 mm	30°	3,7 mm	1,4 mm
VT-0660.00.176	6,6 mm	176 mm	0°	3,7 mm	1,5 mm
VT-0660.30.166	6,6 mm	166 mm	30°	3,7 mm	1,5 mm
VT-0660.30.176	6,6 mm	176 mm	30°	3,7 mm	1,5 mm
VT-0660.30.186	6,6 mm	186 mm	30°	3,7 mm	1,5 mm
VT-0660.30.196	6,6 mm	196 mm	30°	3,7 mm	1,5 mm
VT-0700.15.140	7,0 mm	140 mm	15°	4,1 mm	1,5 mm
VT-0700.30.130	7,0 mm	130 mm	30°	4,1 mm	1,5 mm
VT-0700.30.140	7,0 mm	140 mm	30°	4,1 mm	1,5 mm
VT-0700.30.176	7,0 mm	176 mm	30°	4,1 mm	1,5 mm
VT-0700.30.184	7,0 mm	184 mm	30°	4,1 mm	1,5 mm
VT-0700.30.196	7,0 mm	196 mm	30°	4,1 mm	1,5 mm
VT-0700.30.207	7,0 mm	207 mm	30°	4,1 mm	1,5 mm
VT-0730.15.068	7,3 mm	68 mm	15°	4,7 mm	1,5 mm
VT-0730.15.150	7,3 mm	150 mm	15°	4,7 mm	1,5 mm

Article number	Ø Diameter	Working Length	Direction of View	Ø Working Channel	Ø Suctional & Irrigation Channel
VT-0730.30.125	7,3 mm	125 mm	30°	4,7 mm	1,5 mm
VT-0730.30.130	7,3 mm	130 mm	30°	4,7 mm	1,5 mm
VT-0730.30.140	7,3 mm	140 mm	30°	4,7 mm	1,5 mm
VT-0730.30.142	7,3 mm	142 mm	30°	4,7 mm	1,5 mm
VT-0730.30.180	7,3 mm	180 mm	30°	4,7 mm	1,5 mm
VT-0760.30.125	7,6 mm	125 mm	30°	4,7 mm	1,5 mm
VT-0760.30.130	7,6 mm	130 mm	30°	4,7 mm	1,5 mm
VT-0760.30.166	7,6 mm	166 mm	30°	4,7 mm	1,5 mm
VT-0760.30.171	7,6 mm	171 mm	30°	4,7 mm	1,5 mm
VT-0840.15.125_52	8,4 mm	125 mm	15°	5,2 mm	1,5 mm
VT-0840.15.125_55	8,4 mm	125 mm	15°	5,5 mm	1,5 mm
VT-0840.15.125_57	8,4 mm	125 mm	15°	5,7 mm	1,5 mm
VT-1000.15.125_60	10,0 mm	125 mm	15°	6,0 mm	2,0 mm
VT-1000.15.125_64	10,0 mm	125 mm	15°	6,4 mm	1,8 mm
VT-1000.15.125_71	10,0 mm	125 mm	15°	7,1 mm	1,6 mm
VT-1000.15.130_60	10,0 mm	130 mm	15°	6,0 mm	2,0 mm
VT-1000.15.130_64	10,0 mm	130 mm	15°	6,4 mm	1,8 mm
VT-1000.15.130_71	10,0 mm	130 mm	15°	7,1 mm	1,6 mm
VT-1000.15.140_60	10,0 mm	140 mm	15°	6,0 mm	2,0 mm
VT-1000.15.140_64	10,0 mm	140 mm	15°	6,4 mm	1,8 mm
VT-1000.15.140_71	10,0 mm	140 mm	15°	7,1 mm	1,6 mm
VT-1000.15.181_60	10,0 mm	181 mm	15°	6,0 mm	2,0 mm
VT-1000.15.181_64	10,0 mm	181 mm	15°	6,4 mm	1,8 mm
VT-1000.15.181_71	10,0 mm	181 mm	15°	7,1 mm	1,6 mm