




**seliger®**

Version: 01/2021

State of print: 12/2021



#### PRODUCT INFORMATION

Designation:	seliger Gateway 
Article-No.:	920000
Range of application:	Communication between the WLAN router and the various seliger connect products and / or the seliger connect duo
Overall performance:	5 W
IP-Class:	IP20
Input voltage:	5V 1A

## APPLICATION

The seliger Gateway models can be controlled via the Seliger smart app.

The model seliger Gateway can only be used and controlled in conjunction with the app. The use of the seliger Gateway is described below:

1. Connect the cable with the USB-site to the power supply unit and the Micro-USB-site to the Gateway.
2. Plug the power supply unit from the Gateway into the socket.
  - The pilot lamp on the Gateway blinks red and lights up blue.

### Downloading the app

The Seliger smart app can be downloaded via the website [www.seliger.eu](http://www.seliger.eu) or via the QR code specified in chapter 6.2.

Proceed as follows to use the Seliger smart app in conjunction with the seliger Gateway:

1. Activate Bluetooth on your mobile phone and share your location.
2. Start the Seliger smart app.
  - Agree to the data protection ordinance.



3. Please create an account if you are downloading the Seliger smart app for the first time. Please log in if you already have an account.

<

## Registrieren

Deutschland >

max@mustermann.de ✕

Verifizierungscode abrufen

f G

4. Enter your e-mail address. You will receive a confirmation code via e-mail.

<

## Geben Sie den Bestätigungscode ein

8 1 8 9 5 \_

Der Bestätigungscode wurde Ihnen per E-Mail gesendet.  
max@mustermann.de erneut senden(23s)

Hast du keinen Code bekommen?

1	2	3	✕
4	5	6	OK
7	8	9	.-
	0		/

1234567890


5. Enter the confirmation code within 60 seconds.


You can now use the Seliger smart app.


### Establishing a connection:


1. Press the button on the gateway component for 5 seconds.
  - The pilot lamp blinks for 3 minutes red.
  - The blue pilot lamp lights up constantly.
2. Establish the connection via the Seliger smart app.
  - If no connection has been established with the device after 10 minutes, please press the button on the Gateway component again.

### Integrating the Gateway into the Seliger smart app

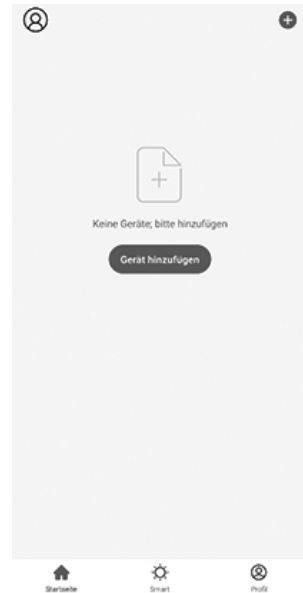


1. Open the Seliger smart app and click on the pushbutton  in the top right corner.
  - The Gateway is recognised automatically.

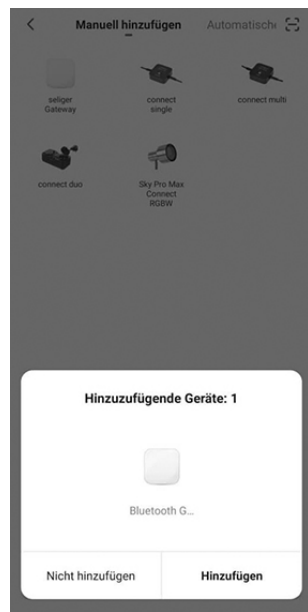


2. Please follow the instructions on the screen to add the Gateway.
  - If the Gateway is not recognised after 10 seconds, follow step 3.
3. After you have pressed the pushbutton , select the pushbutton "Automatic scan".
4. Click on Continue.

5. Enter the password of the WLAN you would like to connect to. Click on Continue.

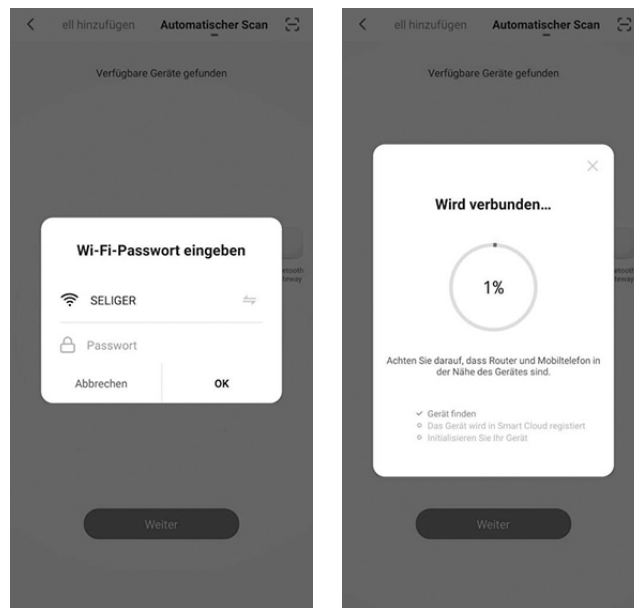

6. Wait until the connection has been established, then click on Continue.

7. As an option, you can assign the Gateway its own name via the ✎ symbol, then click on Continue.
8. In the overview, click on Complete to finish integrating the connect single.
  - As soon as the Gateway has been successfully added, you will find it on the start page.

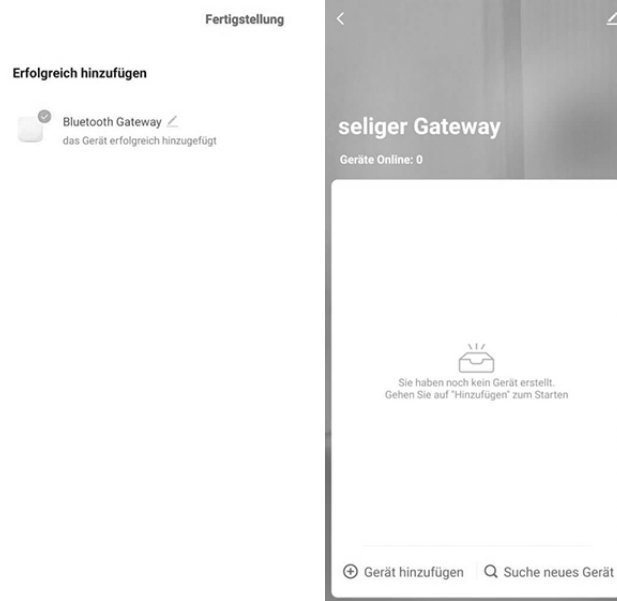

If the connection has not been successful, reset the device and try again.



#### Resetting the device:

1. If the Gateway had already been connected, remove it from the app.
2. Hold the reset button on the gateway component depressed for 5 seconds.



To view the different functions and description of the Seliger smart app, please go to:

[www.seliger.eu/Help](http://www.seliger.eu/Help)

---

Seliger GmbH  
Kuthmühleweg 6  
78050 Villingen  
Germany  
[info@seliger.eu](mailto:info@seliger.eu)  
[www.seliger.eu](http://www.seliger.eu)

